

Whiter
Brighter
Stronger

ULTIMA+™ OP

Ultima+ with Peakform™ Suprafine™ XL 15mm Exposed Tee grid

BENEFITS

- Ideal for open plan spaces where control of ambient noise is an important consideration
- Excellent sound absorption for reduced reverberation and quieter spaces
- Sustainable Contribution
 - Global GreenTag^{CERTIFIED}™ GreenRate™ Level A Certified for Green Star™
 - Cradle to Cradle Certified™ Bronze for WELL Building Standard™
- DuraBrite™, reinforced, scratch resistant face with 'Vacuum Paint – Hard Edge' treatment for easier handling and longer life
- Smoother whiter surface with high light reflective finish for a brighter space
- Complete range of edge details
- Humiguard™ Plus RH99 Sag Resistance
- ISO 5 Clean Room Performance

APPLICATION AREAS

- Open Plan offices
- Cafeterias
- Libraries
- Auditoriums
- Canteens
- Nurses Stations
- Lounges
- Cinemas/Theatres
- Restaurants



ULTIMA+™ OP



RH99
Humidity
Resistant



Scratch
Resistant



Product
Handling
Durability



Washable



ISO 5 Clean
Room ISO
14644-1



Anti mould
and
mildew



Recycled Content
EN ISO 14021



Light Reflectance



Acoustical
Comfort

Panel Options	SQUARE LAY-IN	ANGLED TEGULAR	MICROLOOK™ 90		K2C2 EDGE
	Prelude™ 24mm Grid	Prelude 24mm Grid	Suprafine™ 15mm Grid	Silhouette™ 15mm Grid	One Way / Modular Grid
600 x 600 x 20mm	7682M	7678M	7685M		—
1200 x 600 x 20mm	7684M	7680M	7687M		**
1200 x 400 x 20mm	**	**	**		**
1350 x 450 x 20mm	**	**	**		**
1500 x 500 x 20mm	**	**	**		**

— Not available

** Special items and other sizes available upon request

• Contact your local Armstrong Ceilings representative for stock availability



EN ISO 354 &
EN ISO 11654

NRC	125	250	500	1000	2000	4000	Hz
0.95	0.40	0.80	1.00	0.95	1.00	1.00	α_p



EN ISO 10848-2 &
EN ISO 717-1

CAC
26 dB



Humiguard™ Plus Sag Resistance (RH99% at 0°C – 49°C)
Refer to website for additional information




Conforms with NCC Spec. C1.10 as tested to AS 5637.1:2015 –
Group 1, and ISO 5660 – Group 1 – S



Thermal Insulation (R- Value)
0.54 m²K/W



3.2kg/m² (Tiles)
3.6kg/m² (Planks)

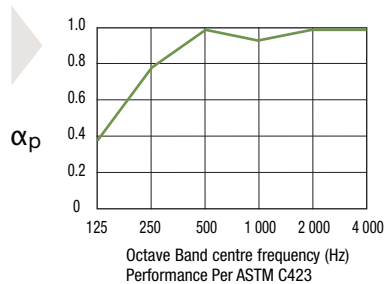

Material

Wet-formed mineral fibre with DuraBrite™ acoustically transparent membrane

Surface Finish

DuraBrite with factory-applied latex paint with 'BioBlock™ mould/mildew inhibitor'. 'Vacuum Paint – Hard Edge' treatment for Tegular and K2C2 edge panels

Backloading Recommendation

Contact your local Armstrong Ceilings representative

Suspension Systems

PeakForm™ Steel options above, with ARMSTRONG BLUE TONGUE® Aluminium upon request

Green Star™: Potential contribution Interiors v1.1 / Design & As Built v1.2

Indoor Environmental Quality			Materials		
Credit 9 / 10 ACOUSTIC COMFORT	Credit 10.2A / 11.2A LIGHTING COMFORT SURFACE ILLUMINANCE	Credit 11.1B / 12.1B VISUAL COMFORT: DAYLIGHT	Credit 12 / 13 INDOOR POLLUTANTS	Credit 21D / 21D SUSTAINABLE PRODUCTS – "Level A" Third Party Certification	Credit 22 / 22 CONSTRUCTION AND DEMOLITION WASTE
✓	✓	✓	✓	✓	✓

Armstrong Ceiling Solutions (Australia) Pty Ltd
www.armstrongceilings.com.au
Email: scentre@knaufarmstrong.com

©2020 Armstrong Ceiling Solutions (Australia) Pty Ltd
Produced 28 April 2020

AWP0420

NSW/ACT
Tel: (02) 9748 1588

VIC/TAS
Tel: (03) 8706 4000

QLD/NT
Tel: (07) 3809 5565

